

Apricum® LW



Apricum LW LED Wall Washer uses Bridgelux High power LEDs and built-in Dulight LED driver / External power supply for outdoor applications. Housing is made of die-cast aluminium with powder coating. Luminaire uses high quality glass diffuser.

Product Features:

- High power LEDs
- Built-in DuLight LED Driver / External power supply
- PC lens offers different light distributions
- RGB (3 in 1) controlled by DMX512 (optional)
- Adjustable steel brackets for installation
- Installation: Surface mounted
- Working temperature: -20°C to 50°C
- IP rating: IP65
- Life span: 30,000 hours

Applications:



Building Facade




Landscape Lighting



Parks



Bridges

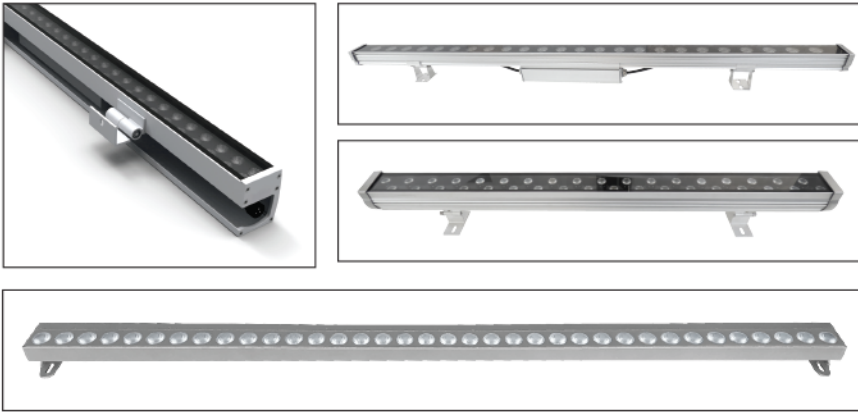


Housing Colors:

- Silver Aluminum
- Grey
- Black



Dimensions

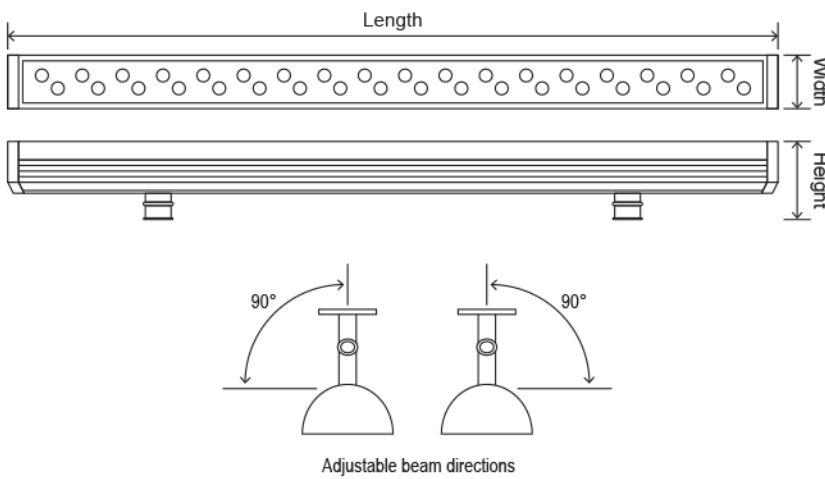

Model	Length	Width	Height
DUAPLW-18	500mm	72mm	130mm
DUAPLW-24		40mm	72mm
DUAPLW-36		72mm	130mm
DUAPLW-48		72mm	130mm
DUAPLW-80		72mm	130mm
DUAPLW2-40RGB	1000mm	105mm	109mm
DUAPLW2-60RGB		105mm	109mm
DUAPLW2-80RGB		102mm	87mm
DUAPLW2-120RGB		102mm	87mm
DUAPLW3-60		50mm	20mm

Technical Specifications

Model	Power [W]	Driver	LED type	No. of LEDs	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [k]	Beam angle	CRI [Ra]	EAN
DUAPLW-18	18	Built-in Dulight Driver	High Power LEDs	18	1440	80	3000 4000 6500 Red Green Blue	24° 30° 45°	> 80	6291112001687
DUAPLW-24	24			24	1920					6291112000031
DUAPLW-36	36			36	2880					6291112000048
DUAPLW-48	48			48	3840					6291112000055
DUAPLW-80	80			80	6400					6291112001687
DUAPLW2-40RGB	40	External 24V Power Supply	High Power LEDs	24	3200	80	3000 4000 6500 Red Green Blue	30°	> 80	6291112001748
DUAPLW2-60RGB	60			24	4800					6291112001755
DUAPLW2-80RGB	80			36	6400					6291112001762
DUAPLW2-120RGB	120			48	9600					6291112001779
DUAPLW3-60	60			36	4800					6291112001786

Electrical Specifications

Rated Supply Voltage	220-240V
Input Voltage	140-265V _{ac} / External 24V Power Supply
Frequency	50/60Hz