

Bello D



Bello D LED Downlight uses EDISON SMD LED's for indoor application. Housing is made of High pressure Aluminum Die-Casted Ring, powder painted.

Product Features:

- EDISON SMD LED's
- Dulight LED Driver
- High Quality PC Opal Diffuser
- Uniform Light Output
- Installation: Recessed Mounted
- IP rating: IP20
- Life-span: 30,000 hours

Applications:



Offices and Restaurants




Showrooms and Factories



Hotels



Dimensions

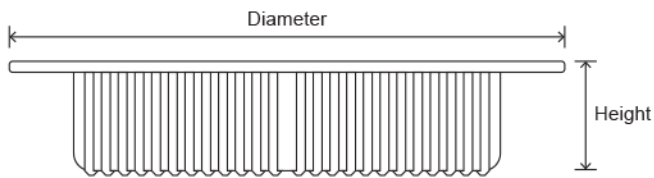

Model	Diameter	Height
DUBED-03	70mm	30mm
DUBED-05	98mm	30mm
DUBED-07	110mm	30mm
DUBED-09	120mm	30mm
DUBED-12	145mm	30mm
DUBED-15	172mm	30mm
DUBED-18	180mm	30mm
DUBED-22	230mm	30mm

Technical Specifications

Model	Power [W]	LED type	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [k]	Beam angle	CRI [Ra]	Cut-out [mm]	EAN
DUBED-03	3	SMD	219	73	3000 4000 6500	120°	> 80	48	6290412001724
DUBED-05	5		370	74				68	6290412001731
DUBED-07	7		525	75				78	6290412001748
DUBED-09	9		693	77				88	6290412001755
DUBED-12	12		948	79				109	6290412001762
DUBED-15	15		1215	81				132	6290412001779
DUBED-18	18		1494	83				140	6290412001786
DUBED-22	22		1870	85				186	6290412001793

Electrical Specifications

Rated Supply Voltage	220-240V
Frequency	50/60Hz