

Bello LPQ



Bello LPQ LED square panel downlight uses EDISON SMD LEDs for indoor applications. Housing is made of high pressure aluminium die-casted with epoxy powder coating. Luminaire uses opal PC diffusers.

Product Features:

- EDISON SMD LEDs
- DuLight or Tridonic LED Driver
- Laser printed Mitsubishi light guide plate
- Installation: Recessed mounted
- IP rating: IP20
- Life span: 30,000 - 50,000 hours

Applications:



Offices and Restaurants



Hospitals




Shops



TRIDONIC








Dimensions

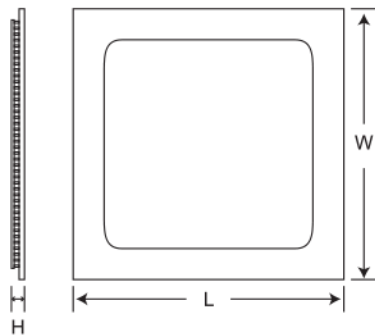

Model	L	W	H
DUBELPQ-03	85mm	85mm	12mm
DUBELPQ-04	105mm	105mm	12mm
DUBELPQ-06	120mm	120mm	12mm
DUBELPQ-09	145mm	145mm	12mm
DUBELPQ-12	170mm	170mm	12mm
DUBELPQ-15	190mm	190mm	12mm
DUBELPQ-18	225mm	225mm	12mm
DUBELPQ-24	295mm	295mm	12mm

Light Distribution Curves

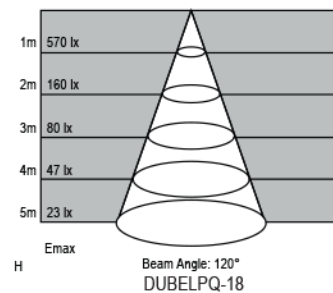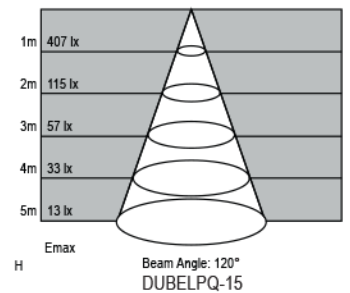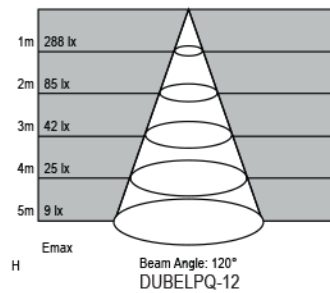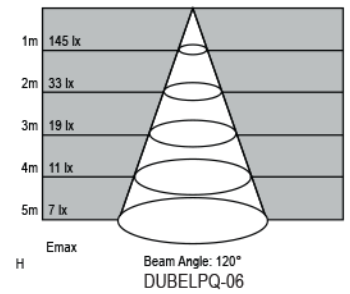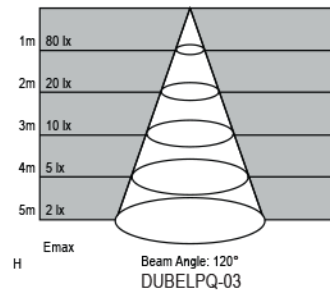

Technical Specifications

Model	Power [W]	LED type	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [k]	Beam angle	CRI [Ra]	Cut-out [mm]	EAN
DUBELPQ-03	3	SMD	230	77	3000 6500	120°	> 80	70x70	6290412000802
DUBELPQ-04	4		320	80				90x90	6290412000819
DUBELPQ-06	6		490	82				105x105	6290412000826
DUBELPQ-09	9		745	83				130x130	6290412000833
DUBELPQ-12	12		1020	85				160x160	6290412000840
DUBELPQ-15	15		1275	85				175x175	6290412001045
DUBELPQ-18	18		1585	88				210x210	6290412001052
DUBELPQ-24	24		2110	88				280x280	6290412001069