

# Bello N



Bello N LED Downlight uses Epistar SMD LED's and Dulight LED Driver for Indoor Application. Housing is made of High pressure Die-casted Aluminum with powder coating.

## Product Features:

- Epistar SMD LEDs
- DuLight LED Driver
- High quality PS Opal diffuser
- Installation: Recessed Mounted
- IP rating: IP20
- Life-span: 30,000 hours

## Applications:



Offices and Hotels



Showrooms



Restaurants




Art Galleries






# EPISTAR

## Dimensions

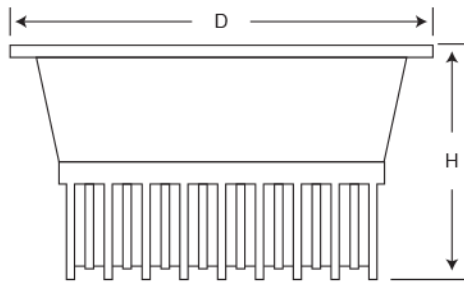

Model	D	H
DUBEN-03	100mm	50mm
DUBEN-06	118mm	60mm
DUBEN-09	145mm	72mm
DUBEN-15	170mm	80mm
DUBEN-20	192mm	90mm
DUBEN-30	230mm	100mm

## Photometric Diagrams

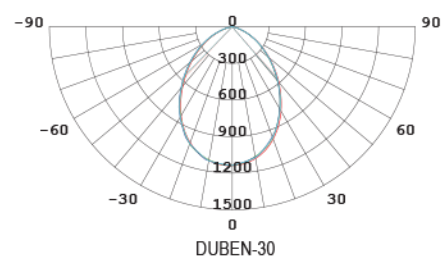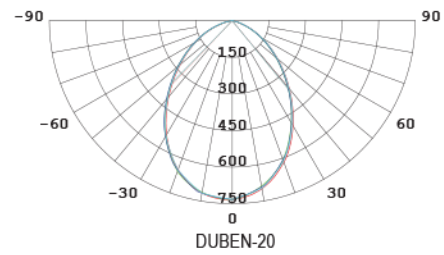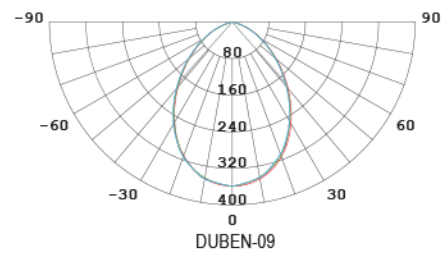

## Technical Specifications

Model	Power [W]	LED type	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [k]	Beam angle	CRI [Ra]	Cut-out [mm]	EAN
DUBEN-03	3	SMD	234	78	3000	80°	> 80	80	6290412001076
DUBEN-06	6		468	78				98	6290412001083
DUBEN-09	9		720	80				125	6290412001090
DUBEN-15	15		1200	80	145			6290412001106	
DUBEN-20	20		1660	83	165			6290412001113	
DUBEN-30	30		2490	83	200			6290412001120	