



Bello S IP65

DOWNLIGHTS



Description

Bello S IP65, LED Downlight, uses COB LED for outdoor applications. Housing is made of Die-Cast Aluminum material.

Product Features

- COB LED
- Installation: Surface mounted
- 0-1/10V dimming, DALI dimming (optional)
- IP Rating: IP65
- Life Span: 50,000 hours

Electrical Specifications

- Rated Supply Voltage: 220-240V
- Frequency: 50/60Hz

Applications



Offices



Restaurants



Showrooms




Washrooms



Saunas


Technical Drawing

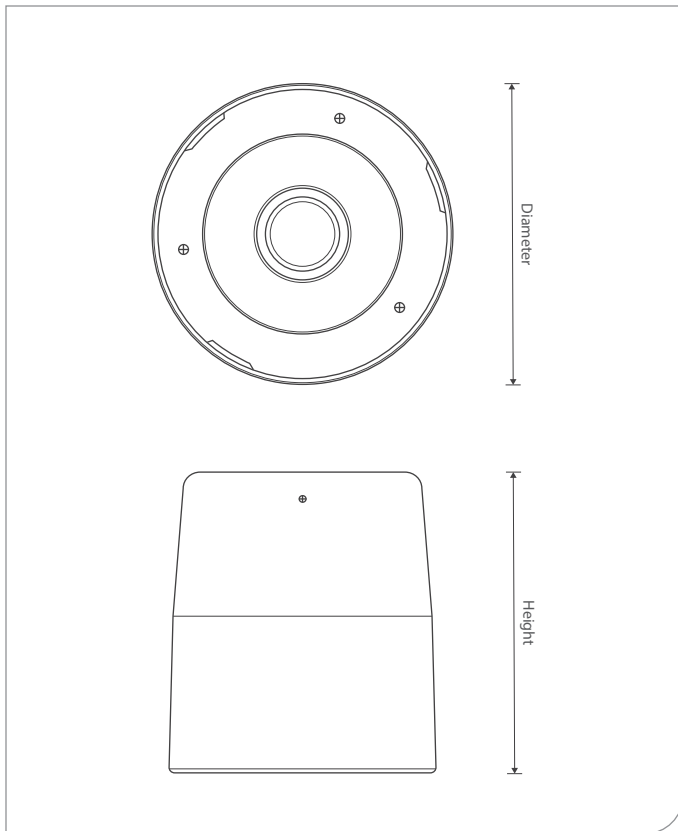

Dimensions

Model	Diameter	Height
DUBESIP65-20	Φ 125mm	115mm
DUBESIP65-30	Φ 160mm	110mm
DUBESIP65-50	Φ 200mm	110mm
DUBESIP65-60	Φ 240mm	110mm

Photometric Diagram

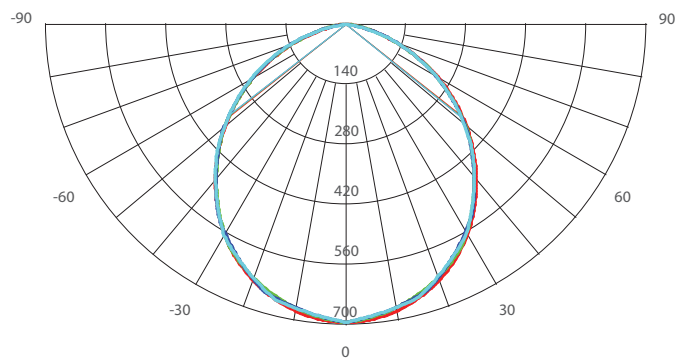

Technical Specifications

Model	Power [W]	LED type	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [K]	Beam angle	CRI [Ra]
DUBESIP65-20	20W	COB LED	2000 lm	100 lm/W	3000K 4000K 6500K	15°/24°/38°/60°	>80
DUBESIP65-30	30W		3000 lm			24°/40°/60°	
DUBESIP65-50	50W		5000 lm			60°/90°	
DUBESIP65-60	60W		6000 lm			60°/108°	