

LED Buried Light



DuLight LED Buried Light uses Bridgelux High power LED's and built-in Dulight LED driver for outdoor applications. Housing is made of die-cast aluminum with stainless steel surface ring.

Product Features:

- Bridgelux High power LEDs
- Built-in DuLight LED Driver
- Tempered glass diffuser
- High quality PC lens
- Walk over pressure: 100KGS/1000N
- Working temperature: -20°C to 55°C
- Installation: Recessed in ground
- IP rating: IP67
- Life Span: 30,000 hours

Applications:



Gardens



Walkways




Shopping Malls




* Also available in Red, Green and Blue color temperatures.

Dimensions



Beam angle options

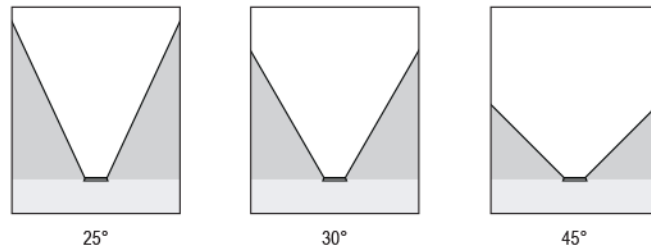

Model	Diameter	Height
DUBL-09	150mm	92mm
DUBL-12	200mm	93mm
DUBL-24	200mm	93mm

Technical Specifications

Model	Power [W]	LED type	No of LEDs	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [k]	Beam angle	CRI [Ra]	EAN
DUBL-09	9	High Power LEDs	9	720	80	3000	25°	> 80	6291212000184
DUBL-12	12		12	960		4000	30°		6291212000160
DUBL-24	24		12	1920		6500	45°		6291212000177

Electrical Specifications

Rated Supply Voltage	220-240V
Input Voltage	140-265V _{AC}
Frequency	50/60Hz