

Estilo SM



Estilo SM LED Spotlight uses BRIDGELUX COB LED and DuLight LED Driver for indoor applications. Housing is made of die-casted aluminum with white color coating.

Product Features:

- BRIDGELUX COB
- DuLight LED Driver
- High quality Glass Diffuser
- Driver can be fixed inside the junction box
- Different beam angle options are available
- Installation: Surface mount.
- IP rating: IP20
- Life-span: 30,000 hours

Applications:



Shops




Showrooms



Art Galleries




Dimensions

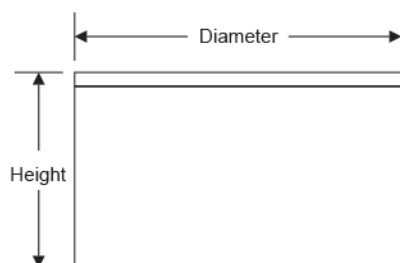

Model	Diameter	Height
DUESSM-05	90mm	35mm
DUESSM-10	90mm	45mm

Photometric Diagrams

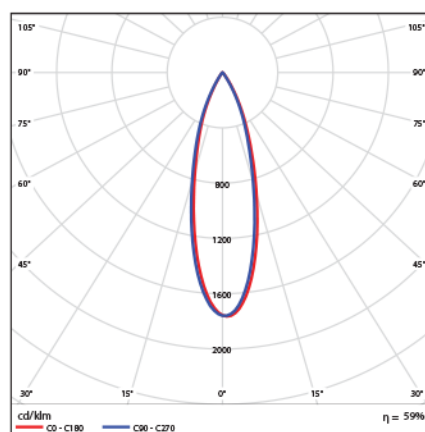

DUESSM-10 24°

Technical Specifications

Model	Power [W]	LED type	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [k]	Beam angle	CRI [Ra]	EAN
DUESSM-05	5	COB	410	82	3000	15°	> 80	6290512000146
			425	85	6500	24°		6290517000141
DUESSM-10	10		820	82	3000	40°		6290512000153
			850	85	6500			6290517000158

Electrical Specifications

Rated Supply Voltage	220-240V
Input Voltage	100-265VAC
Frequency	50/60Hz