

LED FLOODLIGHT

LED Floodlight Powered by SMD LED's and built-in LED Driver.
Housing is made of die-casted aluminium with excellent heat sink design. Luminaire uses tempered glass with high transparency rate.

Product Features:

High Power SMD LED's
built-in Levant LED Driver

High purity Aluminium reflector
adjustable Angle bracket (0-180°)

Working Temperature: -20°C to 50°C


IP rating: IP66

Life span: 30.000h



■ Dimension [mm]

MODEL	LENGTH	WIDTH	HEIGHT
LV-F-20	182mm	180mm	45mm
LV-F-30	230mm	220mm	60mm
LV-F-50	290mm	280mm	70mm
LV-F-100	310mm	280mm	100mm
LV-F-150	310mm	280mm	100mm
LV-F-200	370mm	320mm	100mm
LV-F-300	420mm	380mm	90mm
LV-F-400	420mm	380mm	90mm

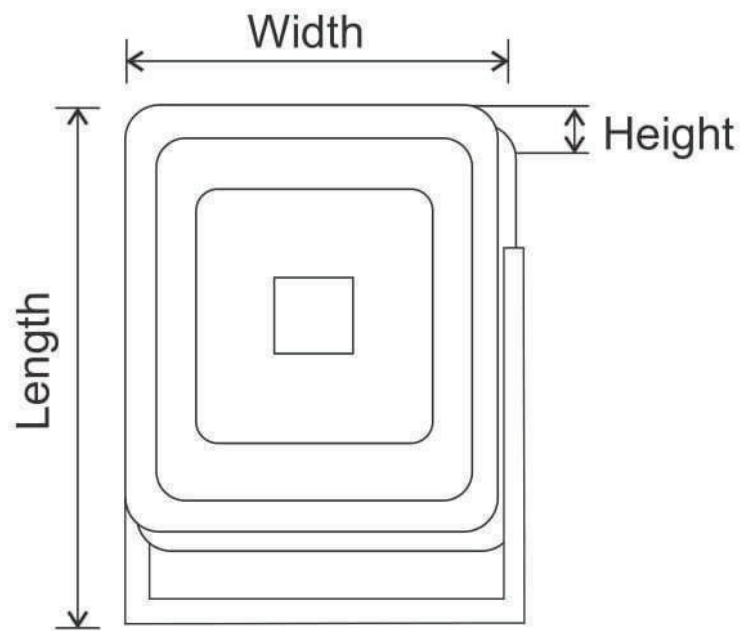

Area Of Application



Car parking



Stadium



Dormitory



Factories



Airport



■ Technical Specification



LV-F-20



LV-F-30



LV-F-50



LV-F-100

POWER:	20W	30W	50W	100W
Efficiency:	100	100	100	100
LUMINOUS: flux [lm]	2000	3000	5000	10000
CRI:	>80	>80	>80	>80
BEAM ANGEL:	120°	120°	120°	120°
EAN	6925222072205	6925222072229	6925222072250	6925222072281



LV-F-150



LV-F-200



LV-F-300



LV-F-400

POWER:	150W	200W	300W	400W
Efficiency:	100	100	100	100
LUMINOUS: flux [lm]	15000	20000	30000	40000
CRI:	>80	>80	>80	>80
BEAM ANGEL:	120°	120°	120°	120°
EAN	6925222072243	6925222072212	6925222072236	6925222072298

Power Factor	>0.9
Rated Supply Voltage	220-240V
Input Voltage	100-300V AC
Frequency	50/60 Hz



IP66



NO FLICKER

CCT [K]



6000K



4000K



3000K



Life Span
30000h



Efficiency
100 lm/w

