

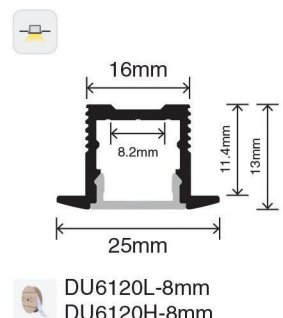
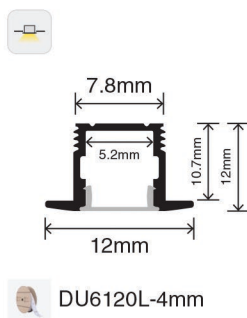
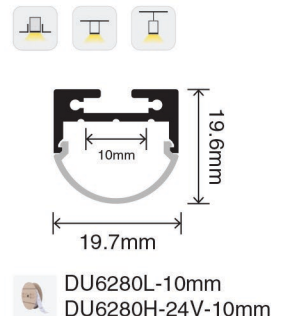
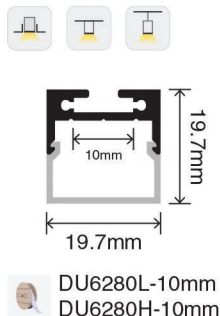
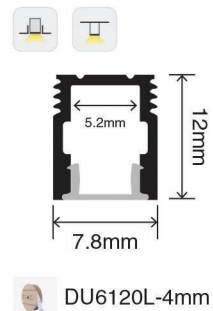
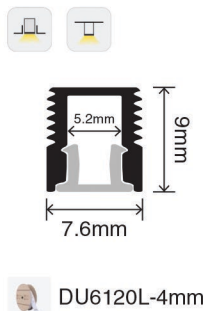
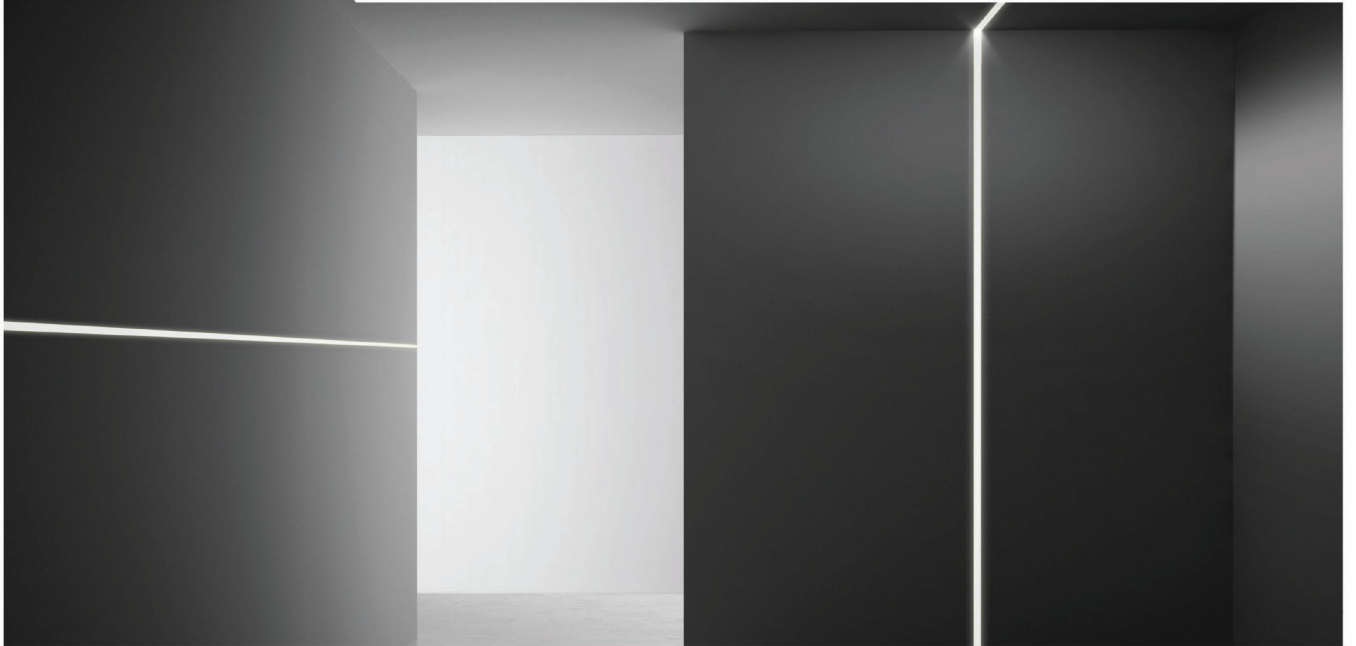
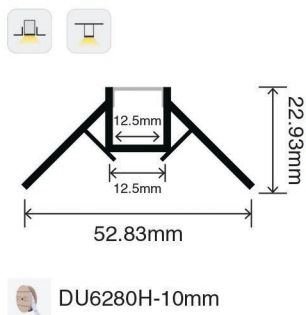
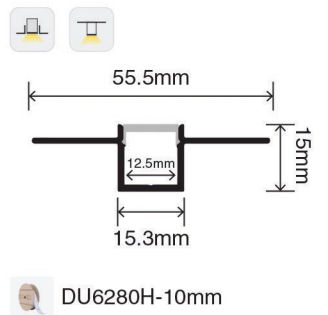
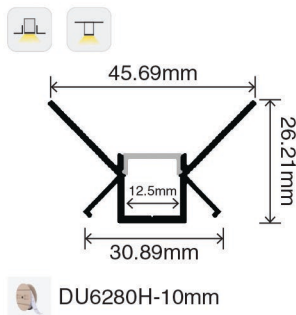
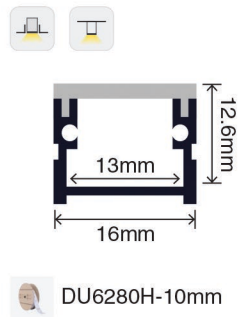
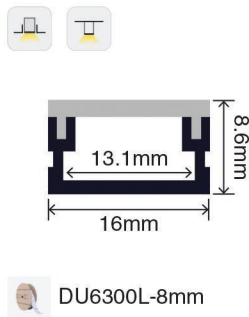
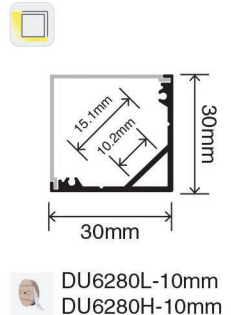
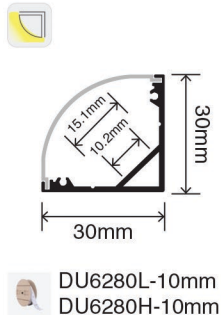



# Slim Linear Profile

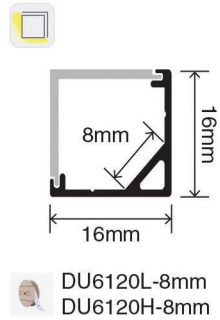

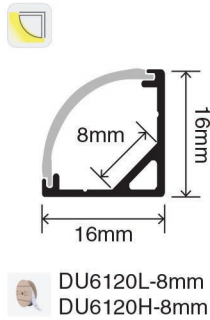

## Standard

---



Profilex1



End Capx2



Clips x2



Diffuserx1




## Optional

---



Power Supply

## Trimless Profile Installation

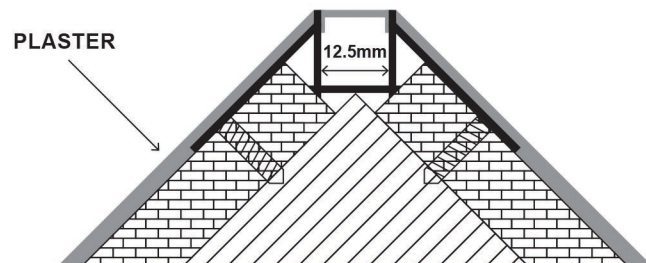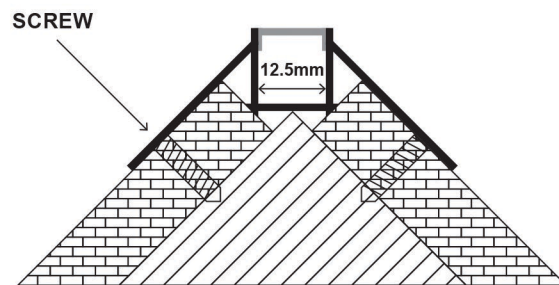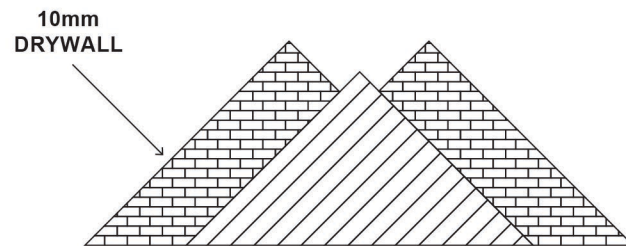

# ACCESSORIES



## LIGHT SOURCE

	DU6120L-4mm	DU6120L-8mm	DU6120H-8mm	DU6300L-8mm	DU6300H-8mm	DU6280L-10mm	DU6280H-10mm
Color temperature	2700 K 3000 K 4000 K 5000 K 6000 K	2700 K 3000 K 4000 K 5000 K 6000 K	2700 K 3000 K 4000 K 5000 K 6000 K	2700 K 3000 K 4000 K 5000 K 6000 K	2700 K 3000 K 4000 K 5000 K 6000 K	2700 K 3000 K 4000 K 5000 K 6000 K	2700 K 3000 K 4000 K 5000 K 6000 K
Color Rendering Index	>90	>90	>90	>90	>90	>90	>90
Lumen output / meter	500lm	550lm	1050 lm	750 lm	1200 lm	850 lm	1600 lm
Voltage input	24V	24V	24V	24V	24V	24V	24V
Power/meter	5 W/m	6 W/m	13 W/m	8 W/m	13 W/m	8 W/m	15 W/m
Waterproof grade	IP33	IP33	IP33	IP33	IP33	IP33	IP33
Size	5000*4*12mm	5000*8*12mm	5000*8*12mm	5000*8*12mm	5000*8*12mm	5000*10*12mm	5000*10*12mm
LEDs / meter	120	120	300	300	300	280	280
Cutting unit	50mm (6)	50mm (6)	50mm (6)	20mm (6)	20mm (6)	50mm (14)	50mm (14)



## POWER SUPPLY

	DUD-24V-025W	DUD-24V-065W	DUD-24V-100W	DU-24-065W	DU-24-100W
Dimming Mode	0-10VDC, PWM, Resistance	0-10VDC, PWM, Resistance	0-10VDC, PWM, Resistance	On / Off	On / Off
Voltage input	100-277VAC 50-60Hz	100-277VAC 50-60Hz	100-277VAC 50-60Hz	100-277VAC 50-60Hz	100-277VAC 50-60Hz
Voltage output	24VDC	24VDC	24VDC	24VDC	24VDC
Current output	1050mA	2800mA	4100mA	2700mA	4170mA
Power	25W	65W	100W	65W	100W
Size	330*21*20mm	363*34.5*22.5mm	390*38*28.5MM	400*24.5*22MM	420*30.5*26MM