

Apricum[®] L spot



Apricum L spot uses Bridgelux COB LED and built-in DuLight LED driver for outdoor applications. Housing is made of die-cast aluminum with powder color coating. Luminaire uses pure aluminium reflector.

Product Features:

- Bridgelux COB LED
- Built-in DuLight LED Driver
- High quality glass diffuser
- 360° Adjustable Steel bracket for installation
- Working temperature: -20°C to 55°C
- Installation: Surface mounted
- IP rating: IP65
- Life span: 30,000 hours

Applications:




Landscape Lighting



Facade Lighting



Shopping Malls

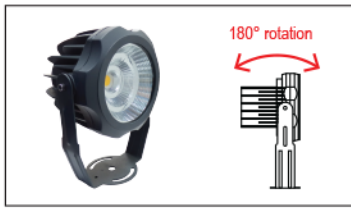

DUPL-10 / DUPL-20 / DUPL-30 / DUPL-50



DU8011-9 / DU8012-18



DU8013-9



DU8014-9



DU8015-9



DU8016-18




DU8017-18




DU8018-18



Dimensions



Model	A1	B1
DUPL-10	Φ85mm	135mm
DUPL-20	Φ112mm	170mm
DUPL-30	Φ150mm	205mm
DUPL-50	Φ230mm	285mm



Model	A2	B2
DUPL11-9	Φ68mm	45mm
DUPL12-18	Φ86mm	47mm
DUPL13-9	Φ73mm	80mm
DUPL14-9	Φ73mm	105mm
DUPL15-9	Φ105mm	45mm
DUPL16-18	Φ87mm	80mm
DUPL17-18	Φ87mm	115mm
DUPL18-18	Φ130mm	50mm

Technical Specifications

Model	Power [W]	LED type	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [k]	Beam angle	CRI [Ra]	EAN
DUPL-10	10		850			25°		6291212000184
DUPL-20	20		1700			30°		6291212000191
DUPL-30	30		2550			45°		6291212000207
DUPL-50	50		4250					6291212000214
DUPL11-9	9		900					6291212000733
DUPL12-18	18	COB	1800		3000			6291212000740
DUPL13-9	9		900		4000		> 80	6291212000757
DUPL14-9	9		900		6000	12°		6291212000764
DUPL15-9	9		900	100		24°		6291212000771
DUPL16-18	18		1800			26°		6291212000788
DUPL17-18	18		1800					6291212000795
DUPL18-18	18		1800					6291212000801

Electrical Specifications

Rated Supply Voltage	220-240V
Frequency	50/60Hz