

Bello PG



Bello PG LED Grille light uses BRIDGELUX or CREE COBs and DuLight LED Driver for indoor applications. Housing is made of die-cast aluminum with powder coating. Luminaire uses high quality PC Reflector.

Product Features:

- BRIDGELUX or CREE COB LED
- DuLight LED Driver
- PMMA Lens providing uniform light distribution
- Available in different light colors
- Adjustable lamp body with horizontal & vertical movement
- Installation: Recessed mounted
- IP rating: IP20
- Lifespan: 30,000 - 50,000 hours

Applications:



Shopping Malls




Restaurants



Lobbies




Dimensions

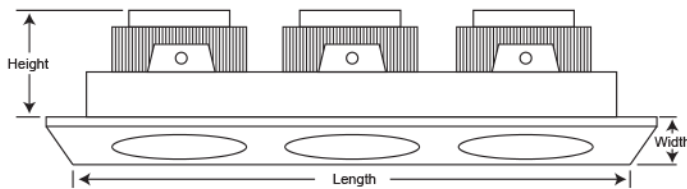

| Model | Length | Width | Height |
|----------|--------|-------|--------|
| DUBPG-30 | 187mm | 187mm | 117mm |
| DUBPG-60 | 350mm | 187mm | 117mm |
| DUBPG-90 | 502mm | 187mm | 117mm |

Photometric Diagrams

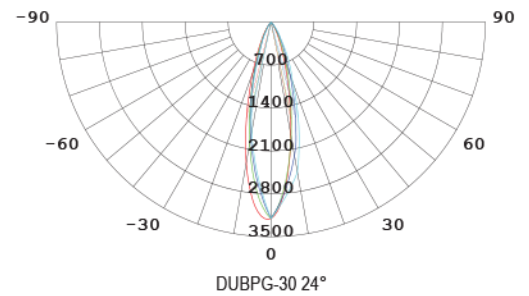

Technical Specifications

| Model | Power [W] | LED type | Luminous flux [lm] | Luminous efficacy [lm/W] | CCT [k] | Beam angle | CRI [Ra] | Cut-out [mm] | EAN |
|----------|-------------|----------|----------------------|----------------------------|--|------------|------------|----------------|---------------|
| DUBPG-30 | 1x30 | | 2430 | 81 | | 15° | | 170x170 | 6290412001458 |
| DUBPG-60 | 2x30 | COB | 4980 | 83 | 3000 / 4500 / 6500 Red / Blue / Green | 24° | > 80 | 330x170 | 6290412001465 |
| DUBPG-90 | 3x30 | | 7470 | 83 | | 38° | | 480x170 | 6290412001472 |

Electrical Specifications

| | |
|----------------------|------------------------|
| Rated Supply Voltage | 220-240V |
| Input Voltage | 100-260V _{AC} |
| Frequency | 50/60Hz |