

Bello V



Bello V LED Downlight uses LUMENMAX SMD LEDs for indoor applications. Housing is made of high pressure aluminium die-casted with powder coating.

Product Features:

- LUMENMAX SMD LEDs
- Integrated design with built-in DuLight LED Driver.
- PMMA Diffuser with highly transparency rate.
- Coating through nano spray technology
- Installation: Recessed mounted
- IP rating: IP20
- Life-span: 30,000 hours

Applications:



Offices and Restaurants



Residential Buildings



Shopping Malls



DUBV100



DUBV200




DUBV300




DUBV400

LUMENMAX LED


Dimensions




DUBV100



DUBV200




DUBV300



DUBV400

Photometric Diagram

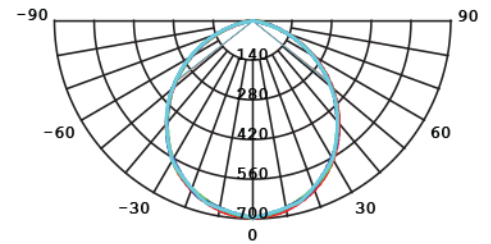

Technical Specifications

Model	Power [W]	LED type	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [k]	Beam angle	CRI [Ra]	Dimensions [mm]		Cut-out [mm]	EAN
								D	H		
DUBV101-03	3	SMDs	230	76	3000	85°	> 80	98.5	77.5	80	6290412000383
DUBV102-06	6		490	81				107	77.5	90	6290412000390
DUBV103-08	8		670	83				117	78	95	6290412000406
DUBV104-10	10		800	80				127	77.5	105	6290412000413
DUBV105-12	12		940	78				146	88	125	6290412000420
DUBV201-08	8		640	80				148	94.5	125	6290412000437
DUBV202-12	12		935	78				179	97.5	160	6290412000444
DUBV203-16	16		1280	80				196.9	97.5	175	6290412000451
DUBV204-20	20		1600	80				231.6	97.5	210	6290412000468
DUBV301-05	5		460	92				95	57.5	70	6290412001878
DUBV302-10	10		950	95	113	65.8	92	6290412001694			
DUBV303-15	15		1425	95	145	65.8	130	6290412001885			
DUBV304-18	18		1746	97	174	68.5	150	6290412001892			
DUBV305-25	25		2450	98	244	84	205	6290412001908			
DUBV401-10	10		850	85	Adjustable CCT	120°		113	57	105	6290412001915
DUBV402-15	15		1290	86				143	61	124	6290412001700
DUBV403-20	20		1880	94				200	68	140	6290412001922
DUBV404-25	25		2350	94				230	75	197	6290412001939
DUBV405-30	30		2820	94				230	75	197	6290412001946
DUBV406-40	40		3800	95				279	94	250	6290412001953