



Bello W

DOWNLIGHTS



Description

Bello W, LED Downlight, uses SMD LEDs for indoor and outdoor applications. Housing is made of Die-casted Aluminum.

Product Features

- SMD LEDs
- High-quality Opal diffuser
- Installation: Recessed Mounted
- 0-1/10V dimming, DALI dimming (optional)
- IP rating: IP65
- Life-span: 50,000 hours

Electrical Specifications

- Rated Supply Voltage: 220-240V
- Frequency: 50/60Hz

Applications



Saunas




Washrooms



Restaurants

Technical Drawing

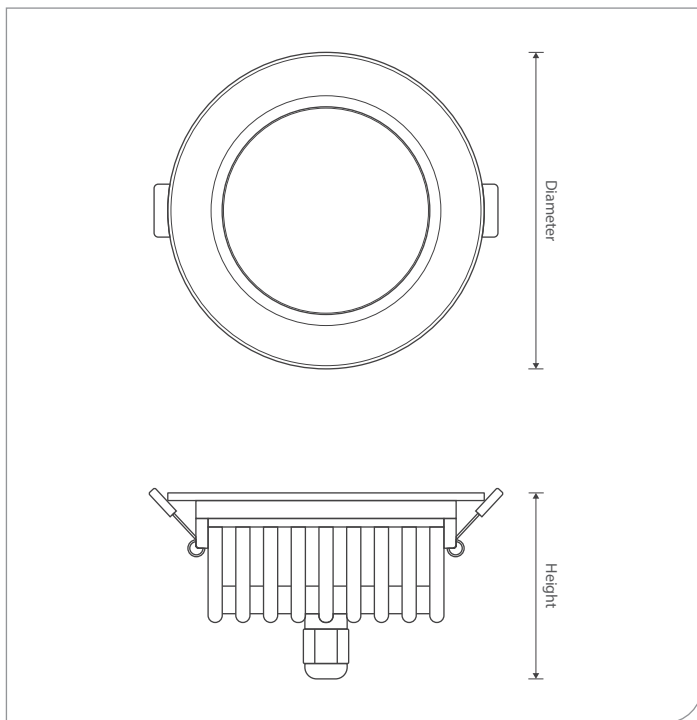

Dimensions

Model	Diameter	Height
DUBEW-07	Φ 90mm	67mm
DUBEW-12	Φ 108mm	72mm

Technical Specifications

Model	Power [W]	LED type	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [K]	Beam angle	Cut-out [mm]	CRI [Ra]
DUBEW-07	7W	SMD LED	630 lm	90 lm/W	3000K	90°	78mm	>80
DUBEW-12	12W		1080 lm		4000K		95mm	
					6500K			