

Patron® L8



Patron L8 LED weather proof luminaire uses LED tubes or LED Modules for indoor and outdoor applications. Housing is made of UV stabilized polycarbonate body and white-coated flat metal plate. Luminaire uses UV stabilized polycarbonated impact resistance diffuser.

Product Features:

- DuLight LED tube [Snowite], OSRAM LEDTube, TRIDONIC LLE Modules
- Built-in LED Converter for OSRAM and DuLight LED tubes
- Can be made with TRIDONIC LED Emergency Kit
- Optional Prismatic or PC Transparent diffuser
- Working temperature: -20°C to 50°C
- Installation: Surface mounted / Pendant
- IP rating: IP65
- IK rating: IK08
- Life-span: 30,000-50,000 hours depending on the selected LEDs

Applications:



Garages



Construction Sites




Factories











Storage Rooms



TRIDONIC

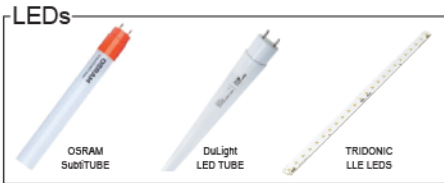

Dimensions

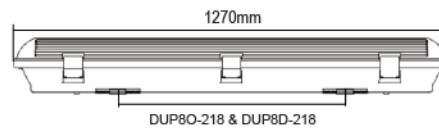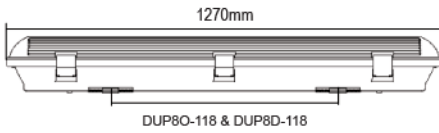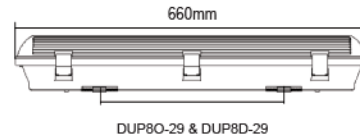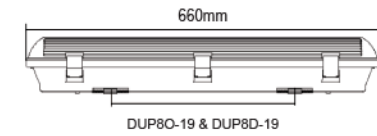

Technical Specification

Model	Power [W]	Driver	Size (mm)	Light Source	Diffuser	CCT [K]	Luminous flux per lamp [lm]	Replacement for	Luminous efficacy [lm/W]	EAN
DUP80-19	1x9		660x95				800	1x18	88	6290712000137
DUP80-29	2x9		660x145	OSRAM			800	2x18	88	6290712000144
DUP80-118	1x18		1270x95	LED TUBE			1700	1x36	94	6290712000151
DUP80-218	2x18	Built-in	1270x145				1700	2x36	94	6290712000168
DUP8D-19	1x9	LED Driver	660x95		PC Diffuser	3000	855-900	1x18	95	6290712000175
DUP8D-29	2x9		660x145	DULIGHT		4000	855-900	2x18	95	6290712000182
DUP8D-118	1x18		1270x95	LED TUBE		6500	1710-1800	1x36	95	6290712000199
DUP8D-218	2x18		1270x145			1710-1800	2x36	95	6290712000205	
DUP8T23	2x11.5	TRIDONIC	1270x95	2x TRIDONIC			1320	1x36	115	6290712000212
DUP8T46	4x11.5	LED Driver	1270x145	LLE			1320	2x36	115	6290712000229