



Bello Elite

DOWNLIGHTS



Reflector Color: ● ○ ● ● ● ● ●

Description

Bello Elite, LED Downlight, uses COB LED for indoor applications. Housing is made of Die-Cast Aluminum. Luminaire uses high-quality PC reflector.

Product Features

- COB LED
- High-quality PC reflector
- Installation: Recessed mounted
- 0-1/10V dimming, DALI dimming, emergency (optional)
- IP Rating: IP20/IP44
- Life Span: 50,000 hours

Electrical Specifications

- Rated Supply Voltage: 220-240V
- Frequency: 50/60Hz

Applications



Showrooms



Restaurants




Shopping Malls



Offices


Technical Drawing

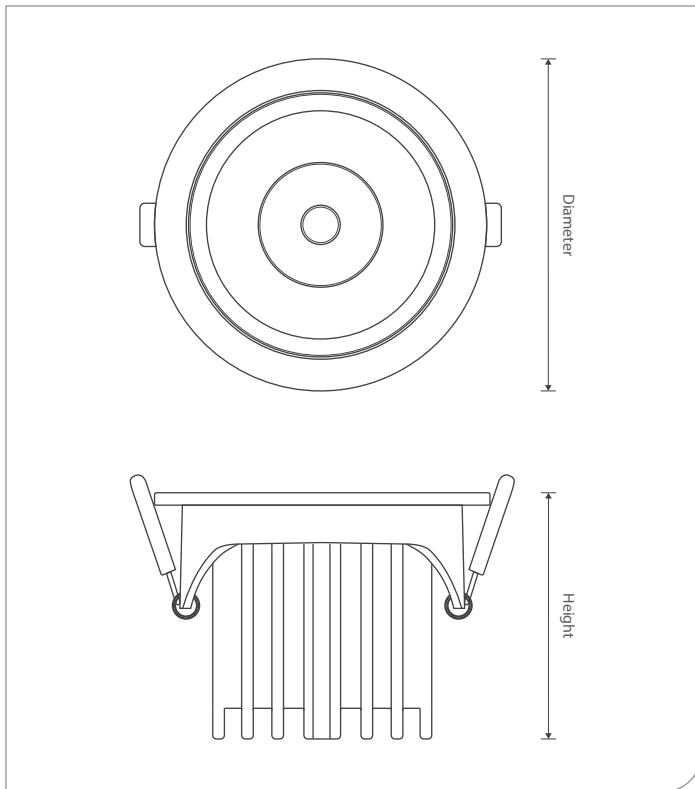

Dimensions

Model	Diameter	Height
DUBEEL-10	Ø 85mm	59mm
DUBEEL-15	Ø 105mm	71mm
DUBEEL-25	Ø 130mm	86mm
DUBEEL-30	Ø 150mm	93mm

Photometric Diagram

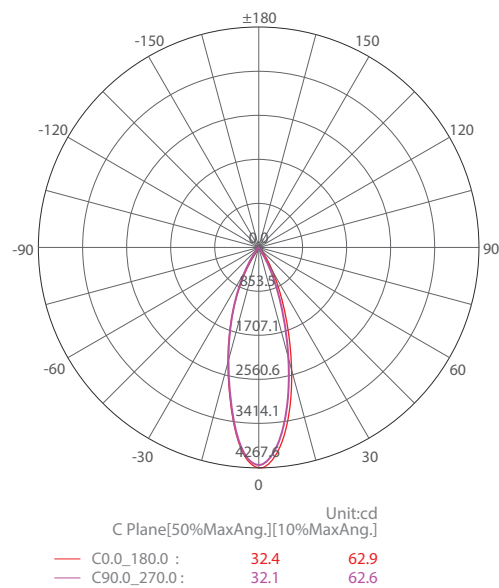

Technical Specifications

Model	Power [W]	LED type	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [K]	Beam angle	Cut-out [mm]	CRI [Ra]
DUBEEL-10	10W	COB LED	1000 lm	100 lm/W	3000K 4000K 6500K	15°	75mm	>80
DUBEEL-15	15W		1500 lm			30°	95mm	
DUBEEL-25	25W		2500 lm			45°	120mm	
DUBEEL-30	30W		3000 lm			45°	140mm	