

# Bello LPS



**Bello LPS** Surface / Recessed Mounted LED panel down light uses High lumen SMD LEDs and DuLight LED Driver for indoor applications. Housing is made of high pressure die-cast aluminum coated with epoxy powder. Luminaire uses PS diffuser with high transparency rate.

## Product Features:

- EDISON SMD LEDs
- DuLight LED Driver
- PMMA LGP provides uniform light distribution
- Available with Motion Sensor
- Slim and Stylish design
- Installation: Surface / Recessed mounted
- IP rating: IP20 / IP44
- Life span: 30,000 hours

## Applications:




Offices and Restaurants



Residential Buildings



Hospitals



DUBELPS




DUBELPSQ




DUBELPS2



## Dimensions


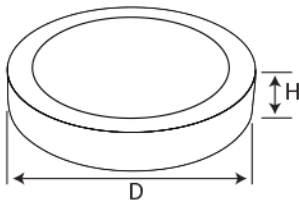


Model	D	H
DUBELPS-06	90mm	24mm
DUBELPS-12	140mm	
DUBELPS-18	190mm	
DUBELPS-24	240mm	
DUBELPS2-12W-M	225mm	32mm
DUBELPS2-18W-M	225mm	
DUBELPS2-20W-M	225mm	32mm
DUBELPS2-24W-M	330mm	
DUBELPS2-30W-M	330mm	



Model	L	W	H
DUBELPSQ-06	90mm	90mm	24mm
DUBELPSQ-12	140mm	140mm	
DUBELPSQ-18	190mm	190mm	
DUBELPSQ-24	240mm	240mm	

## Light Distribution Curves

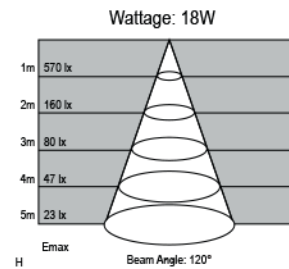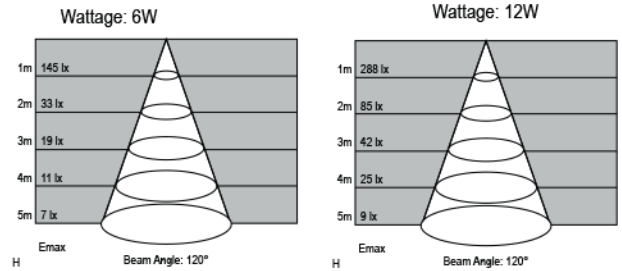

## Technical Specifications

Model	Power [W]	Led type	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [k]	Beam angle	CRI [Ra]	EAN
DUBELPS-06	6	SMD	570	95	3000	120°	> 80	6290412000680
DUBELPS-12	12		1140	95				6290412000697
DUBELPS-18	18		1710	95				6290412000703
DUBELPS-24	24		2280	95				6290412001335
DUBELPSQ-06	6		570	95				6290412000710
DUBELPSQ-12	12		1140	95				6290412000727
DUBELPSQ-18	18		1710	95	6290412000734			
DUBELPSQ-24	24		2280	95	6290412001342			
DUBELPS2-12W-M	12		1020	85	6290412002011			
DUBELPS2-18W-M	18		1530	85	6290412002028			
DUBELPS2-20W-M	20		1700	85	6290412002035			
DUBELPS2-24W-M	24		2040	85	6290412002042			
DUBELPS2-30W-M	30	2550	85	6290412002059				