



Bello R IP65

DOWNLIGHTS



Reflector Color: ● ○ ● ● ● ●



Description

Bello R IP65, LED Downlight, uses COB LED for outdoor applications. Housing is made of Die-Cast Aluminum. Luminaire uses PC lens.

Product Features

- COB LED
- High-quality PC Lens
- Installation: Recessed mounted
- 0-1/10V dimming, DALI dimming, emergency (optional)
- IP Rating: IP65
- Life Span: 50,000 hours

Electrical Specifications

- Rated Supply Voltage: 220-240V
- Frequency: 50/60Hz

Applications



Showrooms



Offices & Restaurants




Saunas



Washrooms


Technical Drawing

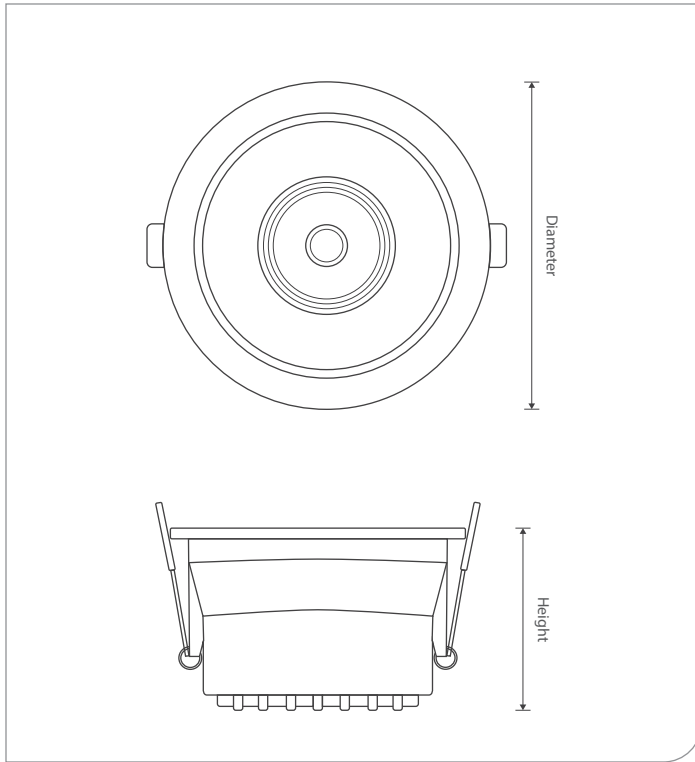

Dimensions

| Model | Diameter | Height |
|--------------|----------|--------|
| DUBERIP65-10 | Φ 85mm | 55mm |
| DUBERIP65-20 | Φ 105mm | 63mm |
| DUBERIP65-30 | Φ 130mm | 77mm |

Photometric Diagram

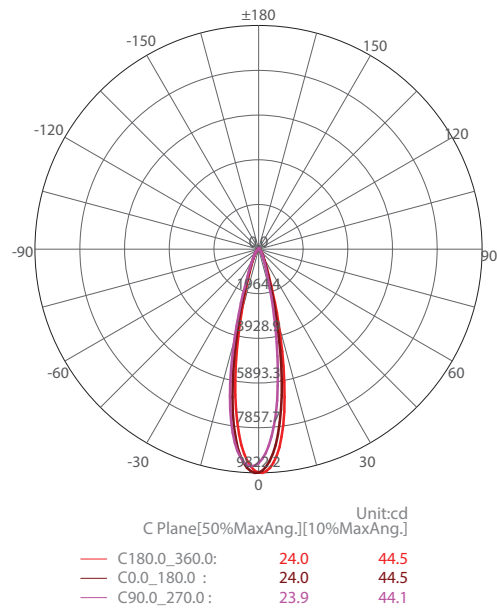

Technical Specifications

| Model | Power [W] | LED type | Luminous flux [lm] | Luminous efficacy [lm/W] | CCT [K] | Beam angle | Cut-out [mm] | CRI [Ra] |
|--------------|-----------|----------|--------------------|--------------------------|---------|------------|--------------|----------|
| DUBERIP65-10 | 10W | COB LED | 1000 lm | 100 lm/W | 3000K | 20° 40° | 75mm | >80 |
| DUBERIP65-20 | 15W | | 2000 lm | | 4000K | | 95mm | |
| DUBERIP65-30 | 30W | | 3000 lm | | 6500K | | 120mm | |