



Bello Tutto

DOWNLIGHTS



Reflector Color: ● ○ ● ● ● ● ● ●

Description

Bello Tutto, LED Downlight, uses COB LED for indoor applications. Housing is made of Die-Cast Aluminum. Luminaire uses PC lens.

Product Features

- COB LED
- High-quality PC Lens
- Installation: Recessed mounted
- 0-1/10V dimming, DALI dimming, emergency (optional)
- IP Rating: IP20/IP44
- Life Span: 50,000 hours

Electrical Specifications

- Rated Supply Voltage: 220-240V
- Frequency: 50/60Hz

Applications



Showrooms



Restaurants




Shopping Malls



Offices


Technical Drawing

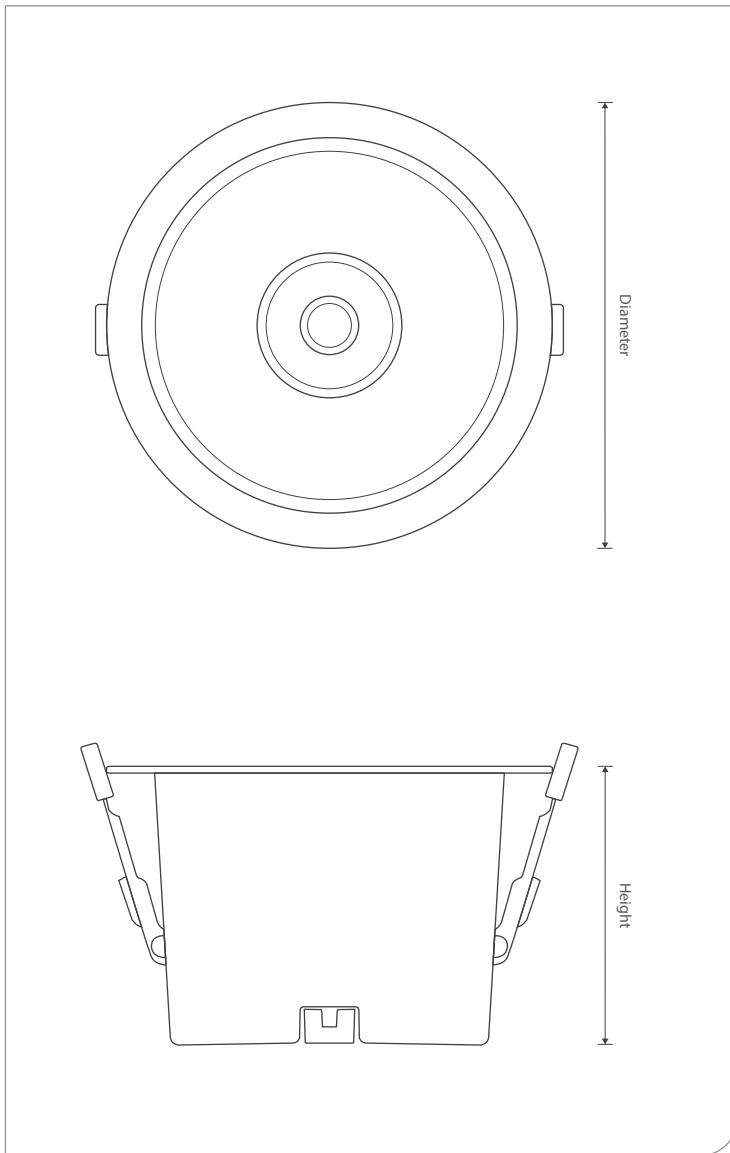

Dimensions

Model	Diameter	Height
DUBETU-10	Φ 90mm	56mm
DUBETU-15	Φ 105mm	64mm
DUBETU-20	Φ 130mm	72mm
DUBETU-30	Φ 160mm	82mm
DUBETU-40	Φ 180mm	90mm
DUBETU-50	Φ 230mm	100mm

Photometric Diagram

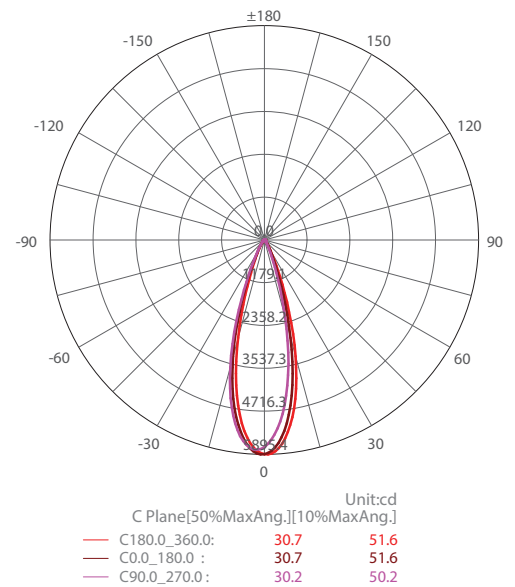

Technical Specifications

Model	Power [W]	LED type	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [K]	Beam angle	Cut-out [mm]	CRI [Ra]
DUBETU-10	10W	COB LED	1000 lm	100 lm/W	3000K 4000K 6500K	13° 24° 38° 60°	75mm	>80
DUBETU-15	15W		1500 lm				95mm	
DUBETU-20	20W		2000 lm				120mm	
DUBETU-30	30W		3000 lm				145mm	
DUBETU-40	40W		4000 lm				160mm	
DUBETU-50	50W		5000 lm				200mm	