


---

# EMERGENCY LIGHTING LUMINAIRE SERIES REDEFINED.




EMERGENCY DOWNLIGHT

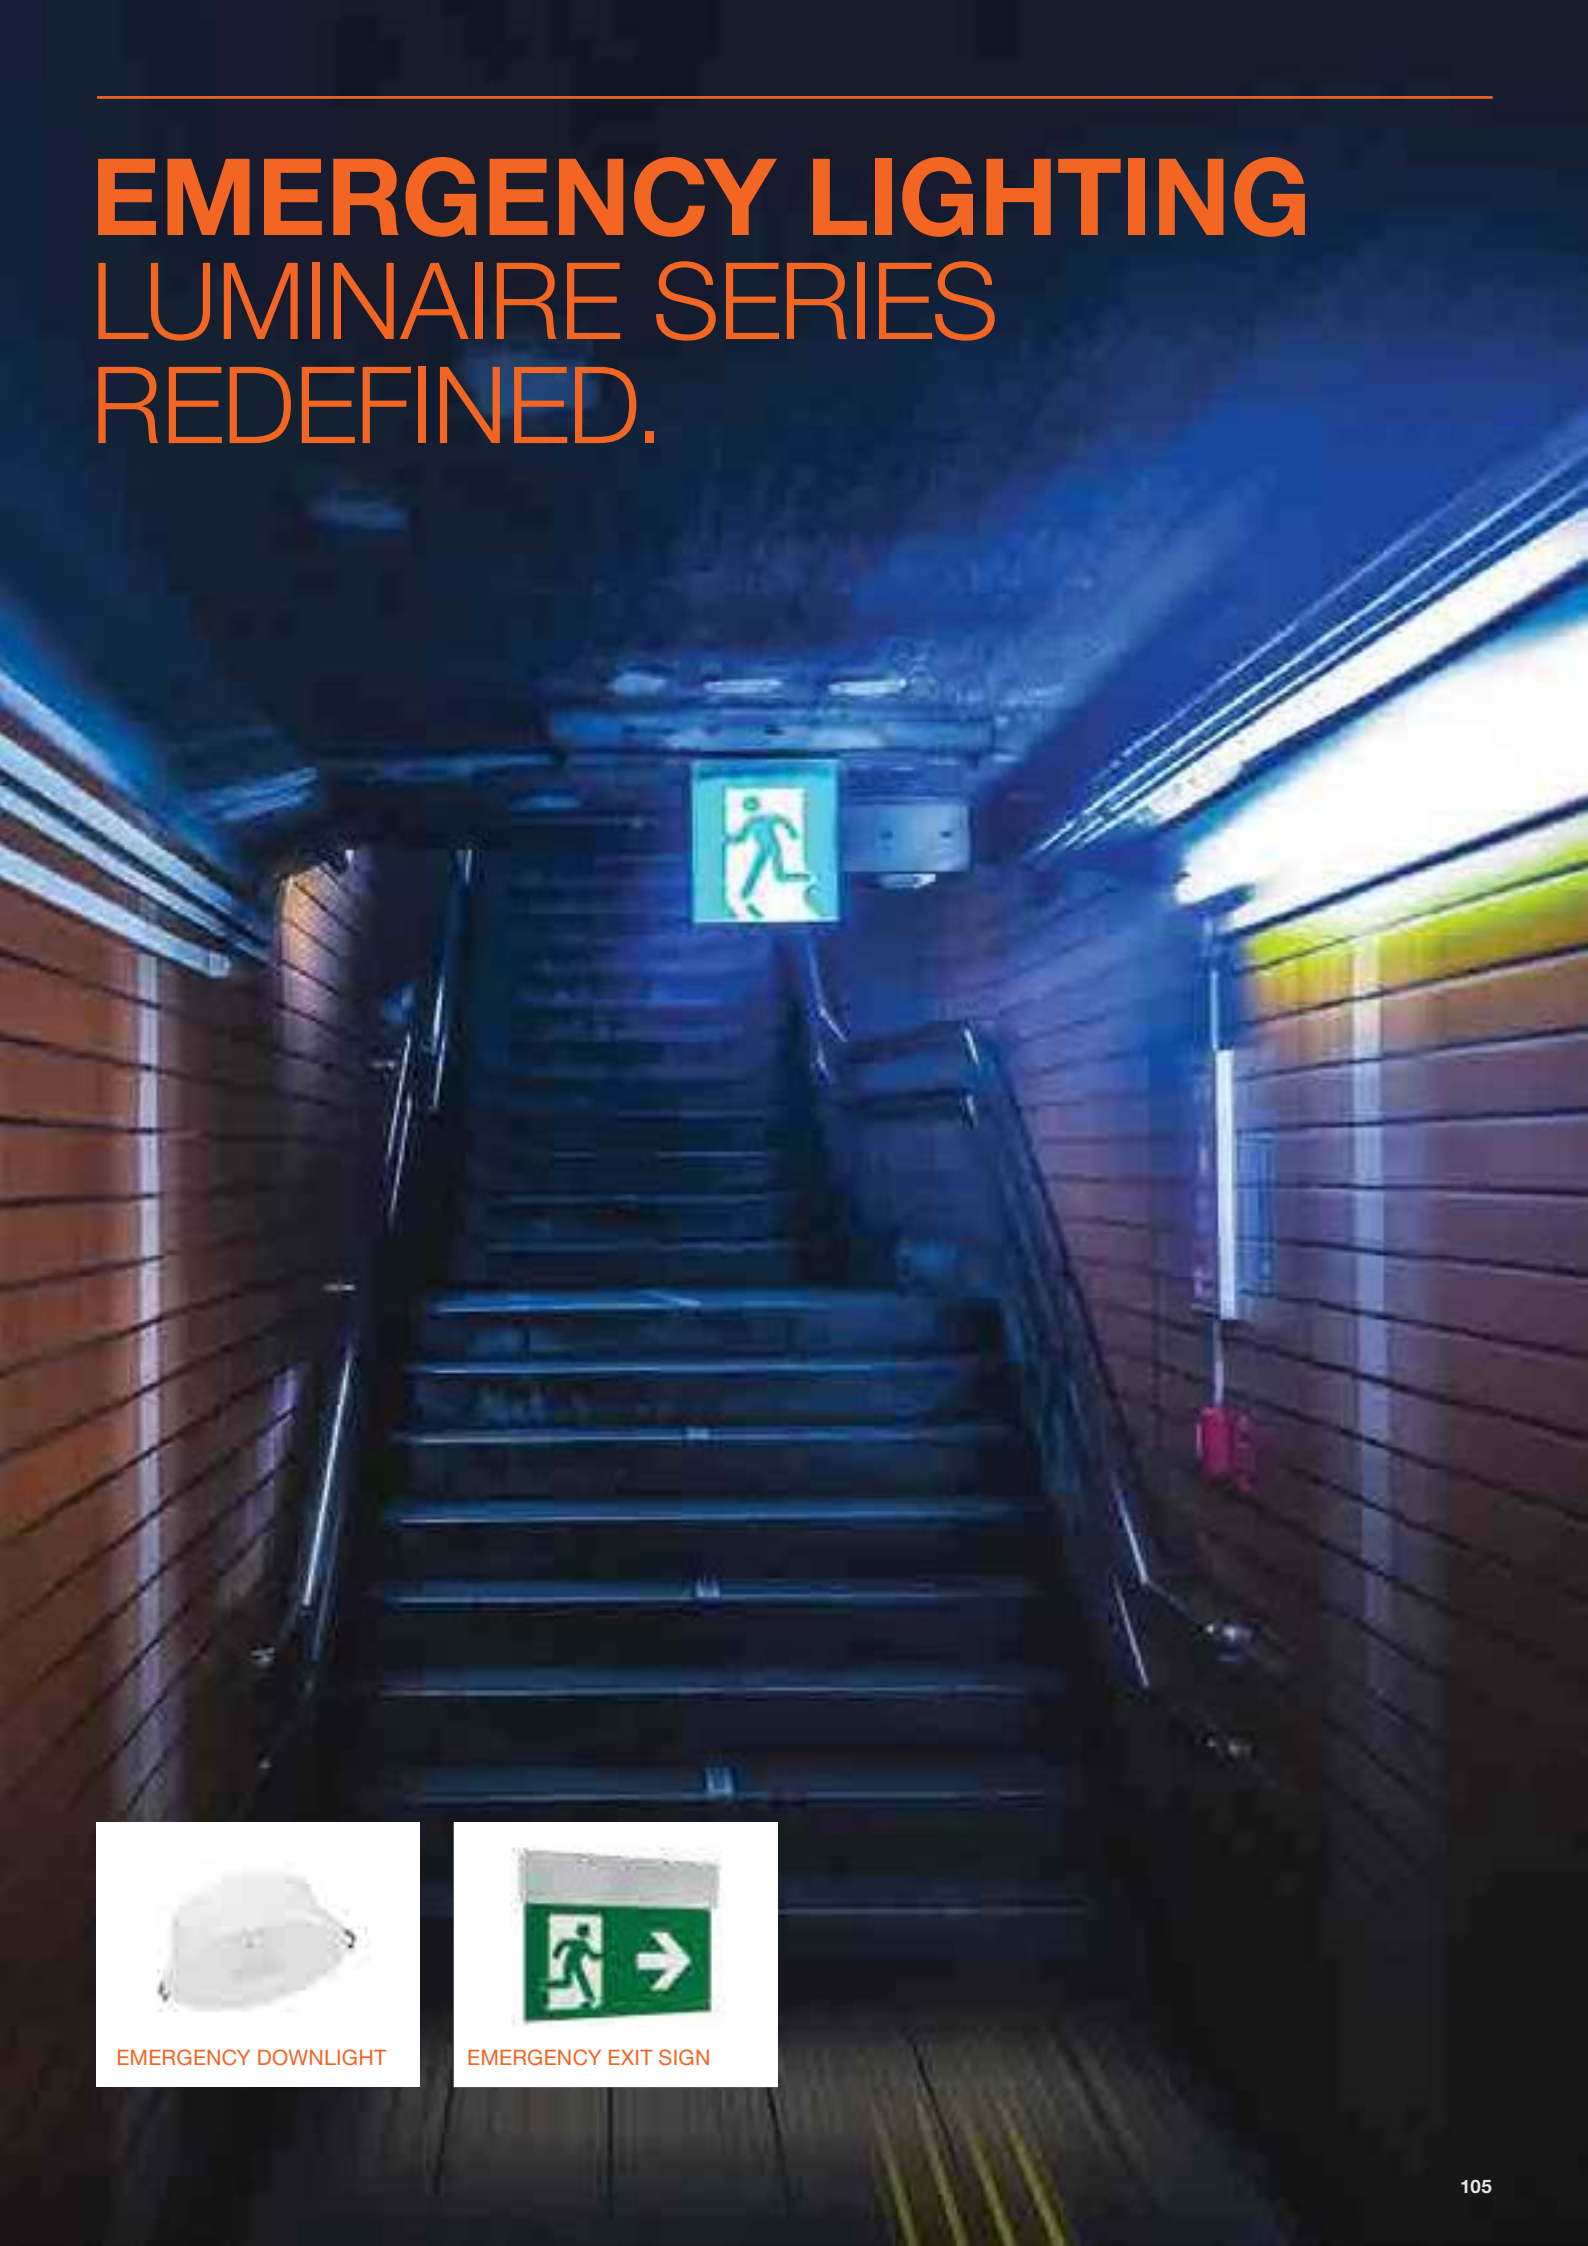

EMERGENCY EXIT SIGN

## LEDVANCE® Emergency Downlight

Emergency Downlights with automatic & manual test function

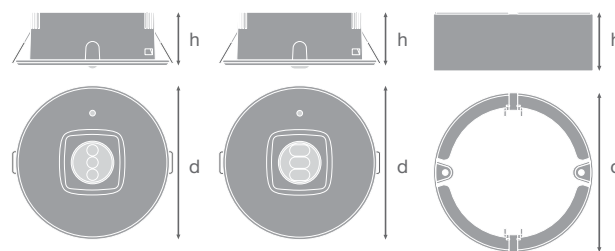

Product Name	Product Number (EAN)	lm	Battery Duration	Test Function	Operating Mode	Battery Technology	d (mm)	h (mm)	Weight (mm)	Icons
<b>LEDVANCE® EMERGENCY DOWNLIGHT</b>										
EM DL DN120 HO AT 3H ANTIPANIC	4058075124554	335	3 h	Automatic	Non-maintained	NiMH	140	48.5	120	8
EM DL DN120 MT 3H ANTIPANIC	4058075124516	235	3 h	Automatic	Non-maintained	NiMH	140	48.5	120	8
EM DL DN120 HO AT 3H ESCAPE	4058075124578	335	3 h	Manual	Maintained/ Non-maintained	NiMH	140	48.5	120	8
EM DL DN120 MT 3H ESCAPE	4058075124530	235	3 h	Manual	Maintained/ Non-maintained	NiMH	140	48.5	120	8
<b>LEDVANCE® EMERGENCY DOWNLIGHT ACCESSORY</b>										
EM DL SURFACE MOUNT KIT	4058075124592	-	-	-	-	-	140	48.5	-	8

### PRODUCT FEATURES


- Battery discharge time: 3 hours
- Mounting type: ceiling recessed or surface mounting
- Function test: automatic (AT) or manual (MT)
- Operation mode: maintained (M) or non-maintained (NM)
- Battery technology: NiMH
- Self-contained luminaires
- Versions available for escape routes or antipanic illumination
- Integrated power supply: control gear & battery

### PRODUCT BENEFITS

- Product family covers various types of emergency lighting applications
- High luminous flux and optimized light distribution
- High test temperature (850°C) according to glow wire test rating IEC 60695-2-12
- High IK rating (IK07) according to impact test IEC 62262-2002

## LEDVANCE® Emergency Exit Sign

Safety signs with various mounting options for wall, ceiling, recessed & pendant

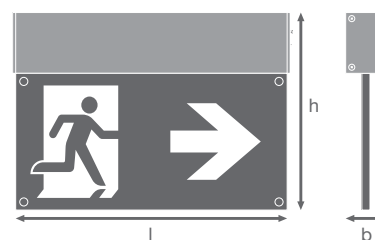

Product Name	Product Number (EAN)	Battery Duration	Test Function	Operating Mode	Battery Technology	l (mm)	b (mm)	h (mm)	
<b>LEDVANCE® EMERGENCY EXIT SIGN</b>									
EM SIGN HB 27M 3/8H AT	4058075144484	3 h / 8 h	Automatic	Maintained/ Non-maintained	LiFePO4	274	40	195	6
<b>LEDVANCE® EMERGENCY EXIT SIGN ACCESSORIES</b>									
EM SIGN HB 27M WALL BRACKET	4058075144507	–	–	–	–	274	42	62	6
EM SIGN HB 27M FLAG BRACKET	4058075144521	–	–	–	–	290	40	76	6
EM SIGN HB 27M SUSPENSION POLE KIT	4058075144545	–	–	–	–	274	40	387	6
EM SIGN HB 27M SUSPENSION CHAIN KIT	4058075144569	–	–	–	–	274	40	2,087	6
EM SIGN HB 27M RECESSED FRAME	4058075144583	–	–	–	–	359	60	60	6

### PRODUCT FEATURES

- Viewing distance: 27m (according to EN 1838:2013)
- Battery discharge time: 3 hours or 8 hours operation time selectable with an integrated switch
- Mounting type: surface, recessed or suspended mounting on wall or ceiling
- Function test: automatic (AT)
- Operation mode: maintained (M) or non-maintained (NM)
- Self-contained luminaires
- Battery technology: LiFePO4

### PRODUCT BENEFITS

- Flexible mounting options
- 4 pictograms (left, right, up, down) acc. to ISO 7010 & reflective white foil included
- Compact & modern design with extruded aluminum housing
- High & homogeneous brightness complying with requirements of DIN4844-1
- High IK rating (IK06) according to impact test IEC 62262-2002