

# Estilo S



Estilo S LED Spotlight uses BRIDGELUX COB LED for indoor applications. Housing is made of die-casted aluminum. Luminaire uses PC reflector and Glass diffuser.

## Product Features:

- BRIDGELUX COB LED
- DuLight or Tridonic LED Driver
- Luminaire can be rotate vertically with tilt rotation feature
- PMMA Lens with high transparency rate
- Installation: Recessed mounted
- IP rating: IP20 / IP44
- Life-span: 30,000-50,000 hours

## Applications:





Offices and Restaurant



Museums and Art Galleries




Shopping Malls

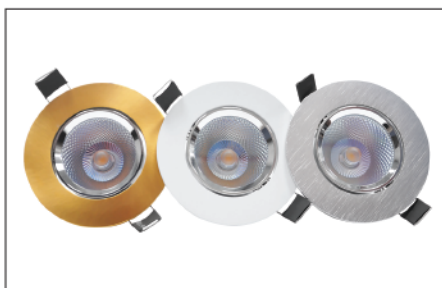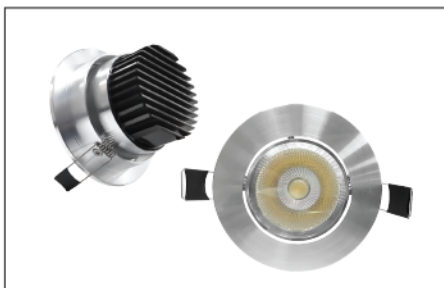

**TRIDONIC**



**BRIDGELUX**  
The Magic of Light™

### Dimensions

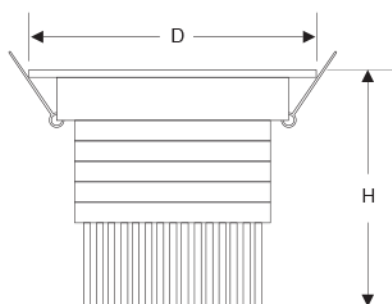

Model	D	H
DUSS-05	89mm	47mm
DUSS-10	109mm	67mm

### Light Distribution Curve

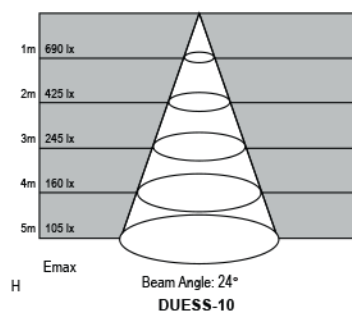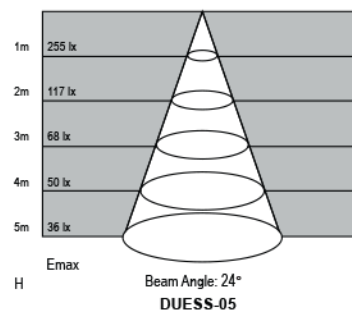

### Technical Specifications

Model	Power [W]	LED type	Luminous flux [lm]	Luminous efficacy [lm/W]	CCT [k]	Beam angle	CRI [Ra]	Cut-out [mm]	EAN
DUSS-05	5	COB	415	83	2700	24°	> 80	65	6290511000048
			440	88	6500			6290517000042	
DUSS-10	10	COB	830	83	2700	24°	> 80	87	6290512000055
			880	88	6500			6290517000059	